



RZ1D1S-1

| | | |
|-----------------------|----------------|---------------------------|
| Switching Capacity | | 6000/saat |
| Connection Type | | 8 Pins |
| Operating Current | | 0.04A |
| Operational Frequency | | 50 Hz |
| Operational Voltage | | 12VAC/DC |
| Product | | Electronic Relay |
| Control | | Digital |
| Type | | Time |
| Contact | | 1CO |
| Current | Ie | 5A (rezistif) |
| Power Consumption | | 0.4W |
| Mechanical Life | Min Qty | 10000000 |
| Electrical Life | Min Qty | 100000 |
| Operating Temperature | | -5°C...+55°C |
| Protection Degree | | IP30 |
| Contact Material | | AgNi |
| Time Interval | | 0,1sec-99,59hour |
| Maximum Contact Power | | 1500 VA |
| Number of Contact | | 1 changeover |
| Max. Reset Time | | ≤100ms |
| Voltage Interval | | (0,85-1.1)*Ue |
| Indicator | | 7 Segment Display |
| Number of Digits | | 4 |
| Serial | | RZ1 Series |
| Specifications | | Compact design |
| | | Fast and silent switching |
| | | Long life |
| | | Fingerproof design |

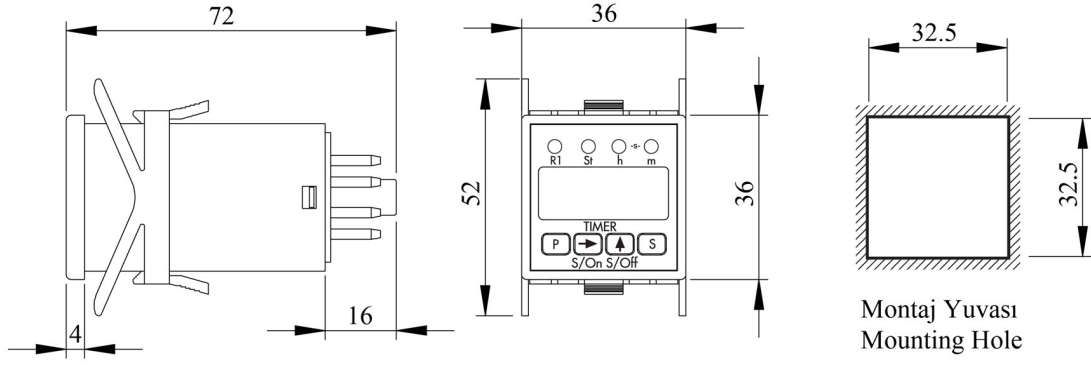

- 2-7 : Besleme / Supply
 1-6 : İnhibit girişı / Inhibit input
 1-8 : Start girişı / Start input
 3-4-5 : Zamana baėlı çıkış kontaktarı / Timed relay output

Not: Dijital zaman röleleri RS1P08 tipi röle soketiyle kullanıma uygundur.
 Note: Digital time relays can be used with RS1P08 type sockets.