




A14B1H10

| | | |
|---------------------------------------|------------------------|----------------------------------|
| Connection Type | | with Terminal |
| Print | | (0-I) Marked |
| Product | | Rocker Switch |
| Contact | | 2NO |
| Color | | Black |
| Illumination | | w/o Illumination |
| Dia | | 30*22mm |
| Current | I_e | 16 A (250V AC) |
| Usage Category | | AC15 |
| Mechanical Life | Min Qty | 50000 |
| Electrical Life | Min Qty | 50000 |
| Operating Frequency | On-Off/Hour | Mech.900 Elec.900 |
| Insulation Voltage | U_i | 300 V |
| Impulse Withstand Voltage | U_{imp} | 2.5 kV |
| Dielectric Strength (Body-Contact) | | 2.500V AC |
| Dielectric Strength (Contact-Contact) | | 1.500V AC |
| Isolation Resistance | | 10 MΩ min. (500V DC) |
| Operating Temperature | | -25 / +80 °C |
| Pollution Degree | | 3 |
| Protection Degree | | IP20 |
| Contact Material | | AgNi |
| Cable Section | | Terminal 6,3*0,8 mm |
| Short Circuit Breaking Capacity | I_{cs} | 1 kA |
| Serial | | A14 Series |
| Body Color | | Black Body |
| Specifications | | With or w/o illumination options |
| | | Four different color options |
| | | Black or white body |



Snap action

Standards / Certificates TS EN 61058-1



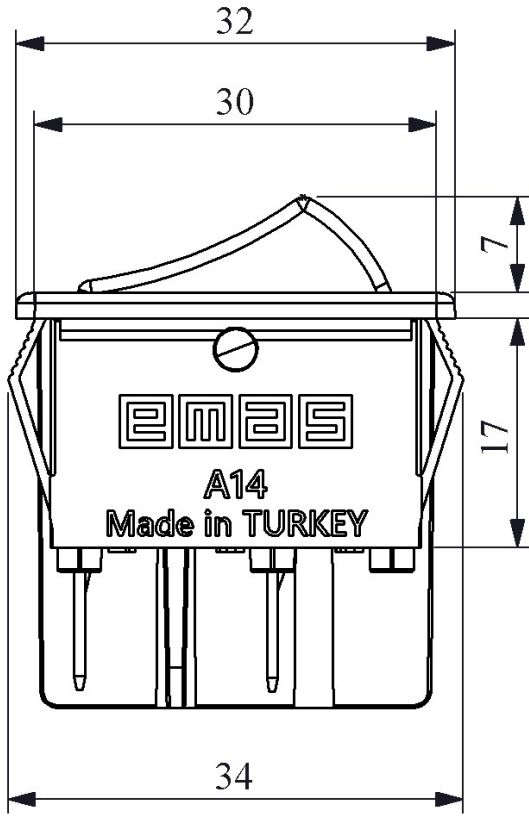

Devre Şeması

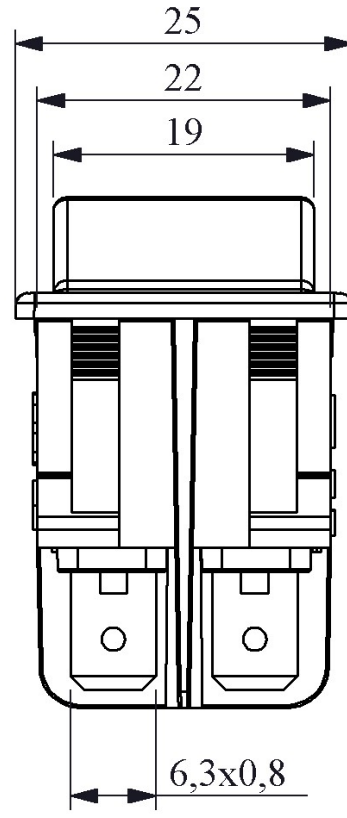

Montaj Ölçüsü 30,2x22,2 mm