




### CM050XB


Operating Current	5-20 mA (12-30V AC/DC)	
Operational Frequency	50 Hz	
Operational Voltage	12-30V AC/DC	
Product	Pilot	
Color	White	
Illumination	with LED	
Dia	22 mm	
Power Consumption	0.7 W	
Insulation Voltage	<b>Ui</b>	300V
Operating Temperature	-15 / + 65 °C	
Pollution Degree	3	
Protection Degree	IP50	
Cable Section	1.5-2.5 mm <sup>2</sup>	
Screw Torque	1,5 Nm	
Production Time	31.12.1899 00:00:00	
Serial	CM Series Metal	
Electrical Life	<b>Min Hour</b>	10000
Specifications	Die cast metal construction for harsh environment, corrosion-resistant chromate plating	
	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availability	
	Variety of products for all areas of application	
	IP65 protection from front side	
Standards / Certificates	TS EN 60947-5-1	





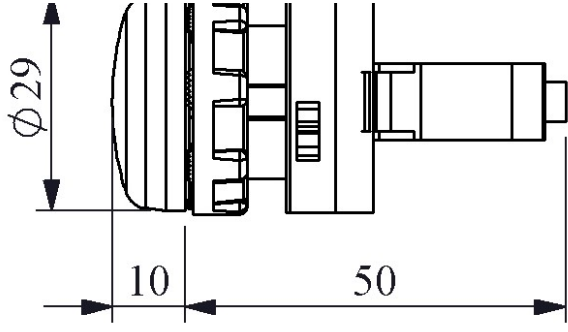

Montaj Ölçüsü  $\text{Ø}22.4 \pm 0.2 \text{ mm}$

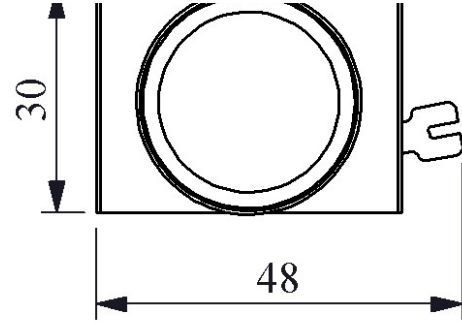

Devre Şeması

