


**CM090XY**

<b>Operating Current</b>		5-20 mA (12-30V AC/DC)
<b>Operational Frequency</b>		50 Hz
<b>Operational Voltage</b>		12-30V AC/DC
<b>Product</b>		Pilot
<b>Color</b>		Green
<b>Illumination</b>		with LED
<b>Dia</b>		22 mm
<b>Power Consumption</b>		0.7 W
<b>Insulation Voltage</b>	<b>Ui</b>	300V
<b>Operating Temperature</b>		-15 / + 65 °C
<b>Pollution Degree</b>		3
<b>Protection Degree</b>		IP50
<b>Cable Section</b>		1.5-2.5 mm <sup>2</sup>
<b>Screw Torque</b>		1,5 Nm
<b>Production Time</b>		31.12.1899 00:00:00
<b>Serial</b>		CM Series Metal
<b>Electrical Life</b>	<b>Min Hour</b>	10000

**Specifications**

Die cast metal construction for harsh environment, corrosion-resistant chromate plating

Non-flammable V0 PA6.6 contact blocks

Various illumination contact blocks availability


Variety of products for all areas of application

IP65 protection from front side


**Standards / Certificates** TS EN 60947-5-1





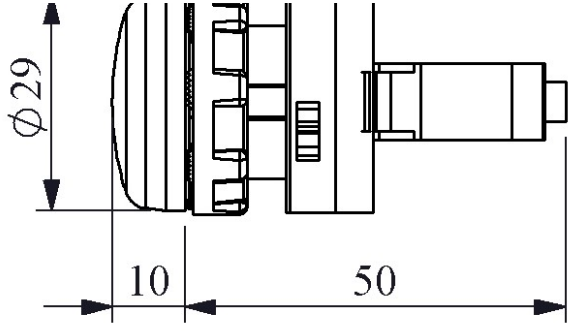

Montaj Ölçüsü  $\phi 22.4 \pm 0.2$  mm

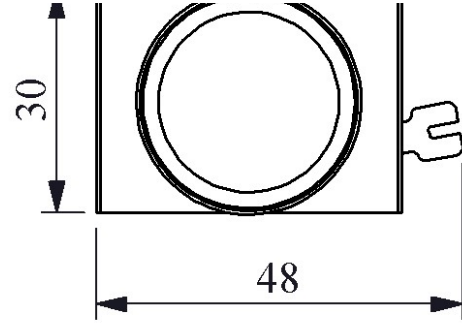

Devre Şeması

