




### CMOS0XS


Operating Current		5-15 mA
Operational Frequency		50 Hz
Operational Voltage		100-230V AC
Product		Pilot
Color		Yellow
Illumination		with LED
Dia		22 mm
Power Consumption		<4 VA
Insulation Voltage	<b>Ui</b>	300V
Operating Temperature		-15 / + 65 °C
Pollution Degree		3
Protection Degree		IP50
Cable Section		1.5-2.5 mm <sup>2</sup>
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		CM Series Metal
Electrical Life	<b>Min Hour</b>	10000
Specifications	Die cast metal construction for harsh environment, corrosion-resistant chromate plating	
	Non-flammable V0 PA6.6 contact blocks	
	Various illumination contact blocks availability	
	Variety of products for all areas of application	
	IP65 protection from front side	
Standards / Certificates	TS EN 60947-5-1	





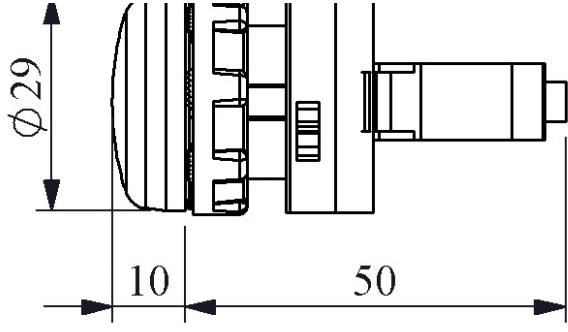

Montaj Ölçüsü  $\text{Ø}22.4 \pm 0.2 \text{ mm}$

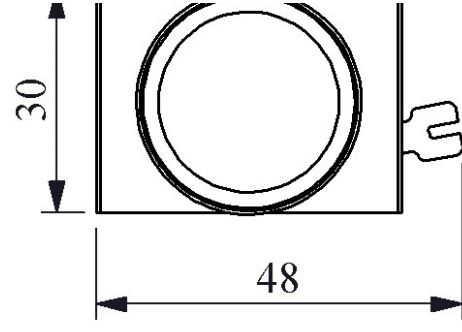

Devre Şeması

