

**CM100AA21**

|  |   |   |
|--|---|---|
| <b>Product</b>                               |   | Control Unit                            |
| <b>Model</b>                                 |   | Key Operated                            |
| <b>Type</b>                                  |   | Spring Return Key Removal at 0 position |
| <b>Label/Position</b>                        |   | (0-I) 60°                               |
| <b>Contact</b>                               |   | 1NO                                     |
| <b>Dia</b>                                   |   | 22 mm                                   |
| <b>Current</b>                               | <b>Ie</b>   | 4 A (230V AC)                           |
| <b>Usage Category</b>                        |   | AC 15                                   |
| <b>Mechanical Life</b>                       | <b>Min Qty</b>  | 500000                                  |
| <b>Electrical Life</b>                       | <b>Min Qty</b>  | 100000                                  |
| <b>Operating Frequency</b>                   | <b>On-Off/Hour</b>  | Mech. 1200 Elec. 1200                   |
| <b>Insulation Voltage</b>                    | <b>Ui</b>   | 300V                                    |
| <b>Impulse Withstand Voltage</b>             | <b>Uimp</b>   | 2.5 kV                                  |
| <b>Dielectric Strength (Body-Contact)</b>    |   | 2.500V AC                               |
| <b>Dielectric Strength (Contact-Contact)</b> |   | 1.500V AC                               |
| <b>Isolation Resistance</b>                  |   | 10 MΩ min. (500V DC)                    |
| <b>Operating Temperature</b>                 |   | -15 / + 65 °C                           |
| <b>Pollution Degree</b>                      |   | 3                                       |
| <b>Protection Degree</b>                     |   | IP65                                    |
| <b>Contact Material</b>                      |   | AgNi                                    |
| <b>Cable Section</b>                         |   | 1.5-2.5 mm <sup>2</sup>                 |
| <b>Screw Torque</b>                          |   | 1,5 Nm                                  |
| <b>Short Circuit Breaking Capacity</b>       | <b>Ics</b>  | 1 kA                                    |
| <b>Production Time</b>                       |   | 31.12.1899 00:00:00                     |
| <b>Serial</b>                                |   | CM Series Metal                         |
| <b>Specifications</b>                        | Die cast metal construction for harsh environment, corrosion-resistant chromate plating |   |

Non-flammable V0 PA6.6 contact blocks


Various illumination contact blocks availability

Variety of products for all areas of application

IP65 protection from front side



**Standards / Certificates** IEC 60947-5-1 TS EN 60947-5-1 UL 508 VDE 0660



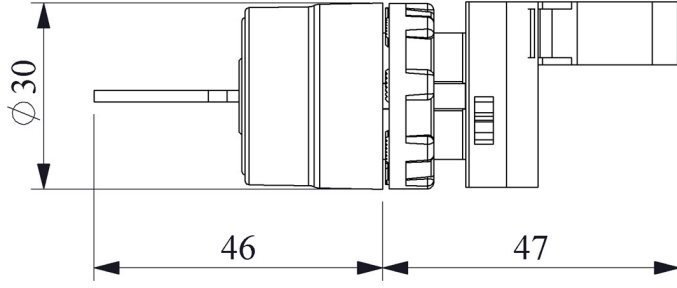


Montaj Ölçüsü  $\text{Ø}22.4 \pm 0.2 \text{ mm}$

Devre Şeması

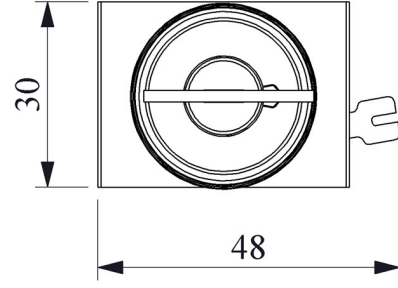

Pozisyon



⤴ Anahtarların çıkarılabildiği pozisyon