

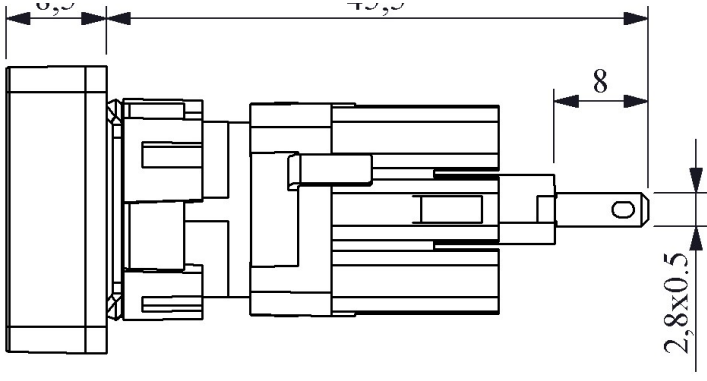

**D060DXK**

<b>Operating Current</b>		10-20 mA (12-24V AC/DC)
<b>Operational Frequency</b>		50 Hz
<b>Operational Voltage</b>		12-30V AC/DC
<b>Product</b>		Pilot
<b>Color</b>		Red
<b>Illumination</b>		with LED
<b>Dia</b>		16 mm
<b>Head Type</b>		Rectangular
<b>Power Consumption</b>		0.6 W
<b>Insulation Voltage</b>	<b>Ui</b>	300V
<b>Operating Temperature</b>		-15 / + 70 °C
<b>Pollution Degree</b>		3
<b>Protection Degree</b>		IP50
<b>Cable Section</b>		Terminal 2,8x0,5
<b>Production Time</b>		31.12.1899 00:00:00
<b>Serial</b>		D Series Plastic
<b>Electrical Life</b>	<b>Min Hour</b>	10000
<b>Specifications</b>		Non-flammable V0 PA6.6 contact blocks
		Various illumination contact blocks availability
		Variety of products for all areas of application
		Ease of use in limited spaces
<b>Standards / Certificates</b>		TS EN 60947-5-1

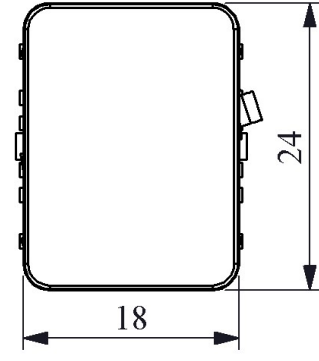


8.5

45.5



Montaj Ölçüsü  $\text{Ø}16.3 \pm 0.2 \text{ mm}$



Devre Şeması

