



IK/	UXU	24 21	MOT
-----	-----	--------------	-----

Weight (Gross with Carton)

Bulb Type

Operational Frequency

Operational Voltage

Product

Mounting

Color

Volume

Power Consumption

Operating Frequency

Insulation Voltage

Operating Temperature

Protection Degree

Cable Section

Screw Torque

Lampholder Type

Production Time

Serial

Buzzer

Electrical Life

Specifications


Gr	204
----	-----

	G.	204			
		LED			
		50 Hz			
		24V AC/DC			
		LED Tower 70mm			
		110mm Plastic Tube and Base			
		Single Level			
		90 dB			
		1W			
	On-Off/Hour	1 Hz			
	Ui	300V			
•		-25 °C /+70 °C			
		IP40			
		0,75-1,5 mm2			
		1,8Nm			
		BA15S			
		31.12.1899 00:00:00			
		IK Series			
		With Buzzer			
	Min Hour	10000			
	Heat resistant, clear vision Polycarbonate signal modules				
	Modular construction				



Easy wiring

Variety of connection bases

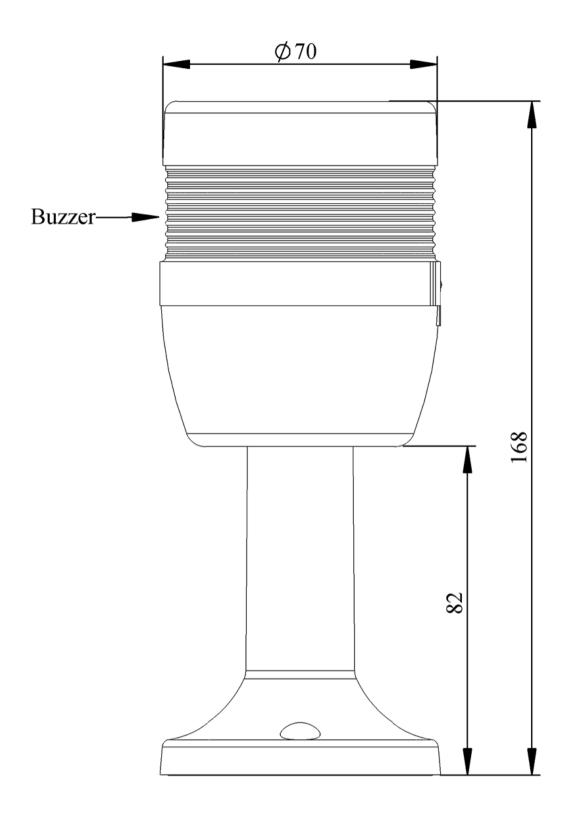



Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limition is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

Upgrade to Commercial Edition of Spire.XLS