
			(R)
	Ш	Е		
_	ш	_		

IK71F024ZM01				
Weight (Gross with Carton)	Gr	279		
Bulb Type		LED		
Operational Frequency		50 Hz		
Operational Voltage		24V AC/DC		
Product		LED Tower 70mm		
Mounting		110mm Plastic Tube and Base		
Color		Two Level		
Illumination		Flasher		
Volume		90 dB		
Power Consumption		2W		
Operating Frequency	On-Off/Hour	1 Hz		
Insulation Voltage	Ui	300V		
Operating Temperature		-25 °C /+70 °C		
Protection Degree		IP40		
Cable Section		0,75-1,5 mm2		
Screw Torque		1,8Nm		
Lampholder Type		BA15S		
Production Time		31.12.1899 00:00:00		
Serial		IK Series		
Buzzer		With Buzzer		
Electrical Life	Min Hour	10000		
Specifications	recifications Heat resistant, clear vision Polycarbonate signal modules			
	Modular construction			
	Easy wiring			
	Variety of connection bases			
C€ ™				

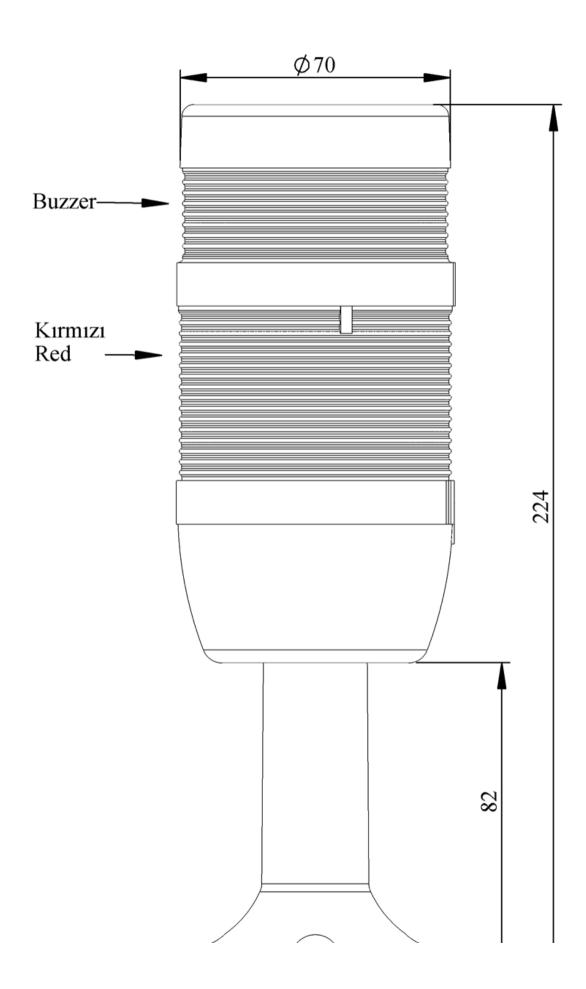

Spire.XLS

Free version is limited to 5 sheets per workbook and 200 rows per sheet. This limition is enforced during reading or writing XLS or PDF files. When converting Excel files to PDF files, you can only get the first 3 pages of PDF file.

Upgrade to Commercial Edition of Spire.XLS