


**MB100DB**


| | | |
|--|--------------------|---------------------------------------|
| Product | | Control Unit |
| Model | | Spring |
| Type | | Flush |
| Contact | | 1NO |
| Color | | White |
| Dia | | 22 mm |
| Current | Ie | 3 A (240V AC) |
| Usage Category | | AC15 |
| Mechanical Life | Min Qty | 300000 |
| Electrical Life | Min Qty | 100000 |
| Operating Frequency | On-Off/Hour | Mech. 3000 Elec. 1200 |
| Insulation Voltage | Ui | 250V |
| Impulse Withstand Voltage | Uimp | 2.5 kV |
| Dielectric Strength (Body-Contact) | | 2.500V AC |
| Dielectric Strength (Contact-Contact) | | 1.500V AC |
| Isolation Resistance | | 10 MΩ Min. (500 V DC) |
| Operating Temperature | | -15 / + 80 °C |
| Pollution Degree | | 3 |
| Protection Degree | | IP50 |
| Contact Material | | AgNi |
| Cable Section | | 1.5-2.5 mm ² |
| Screw Torque | | 1,5 Nm |
| Short Circuit Breaking Capacity | Ics | 1 kA |
| Production Time | | 31.12.1899 00:00:00 |
| Serial | | MB Series Plastic |
| Specifications | | Non-flammable V0 PA6.6 contact blocks |
| | | Monoblock strong body |
| | | Finger safe protection |

Standards / Certificates IEC 60947-5-1 TS EN 60947-5-1



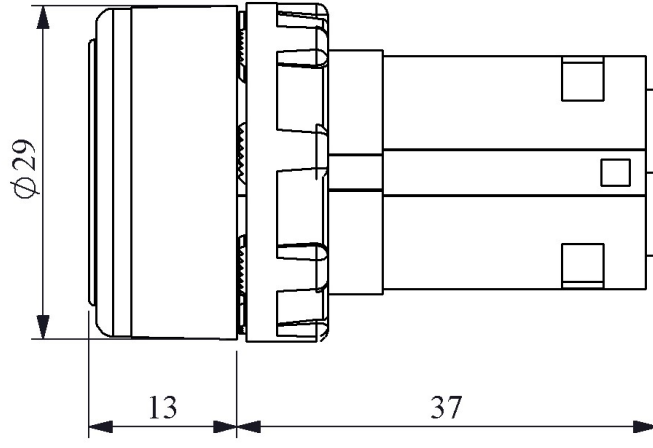

Montaj Ölçüsü $\phi 22.4 \pm 0.2$ mm

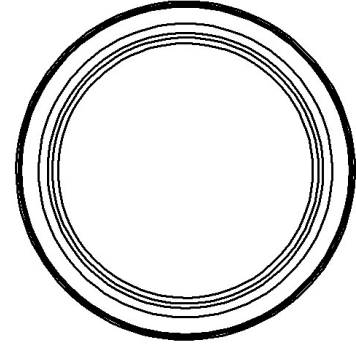

Devre Şeması

13 ——— / ——— 14