






## MBSD110S

Bulb Type		Led
Operating Current		10 mA
Operational Frequency		50 Hz
Operational Voltage		110V AC
Product		Pilot
Color		Yellow
Illumination		with LED
Dia		22 mm
Power Consumption		<2VA
Insulation Voltage	Ui	250 V
Operating Temperature		-15 / + 70 °C
Protection Degree		IP50
Cable Section		1.5-2.5 mm <sup>2</sup>
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		MB Series Plastic
Electrical Life	Min Hour	10000
Specifications	Non-flammable V0 PA6.6 contact blocks	
	Monoblock strong body	
	Finger safe protection	



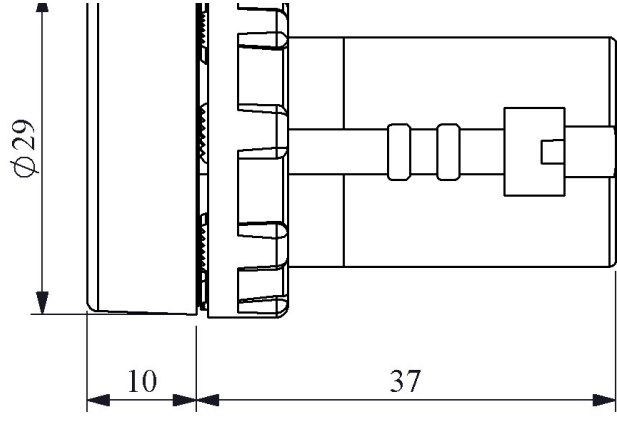

Montaj Ölçüsü  $\phi 22.4 \pm 0.2$  mm



Devre Şeması

