






**MBZX024S**

Operating Current		18 mA
Operational Frequency		50 Hz
Operational Voltage		24V AC/DC
Product		Buzzer
Dia		22 mm
Volume		90 dB
Power Consumption		0.5 W
Insulation Voltage	<b>Ui</b>	250 V
Operating Temperature		-15 / + 70 °C
Protection Degree		IP50
Cable Section		1.5-2.5 mm <sup>2</sup>
Screw Torque		1,5 Nm
Production Time		31.12.1899 00:00:00
Serial		MB Series Plastic
Electrical Life	<b>Min Hour</b>	10000
Specifications		Non-flammable V0 PA6.6 contact blocks
		Monoblock strong body
		Finger safe protection




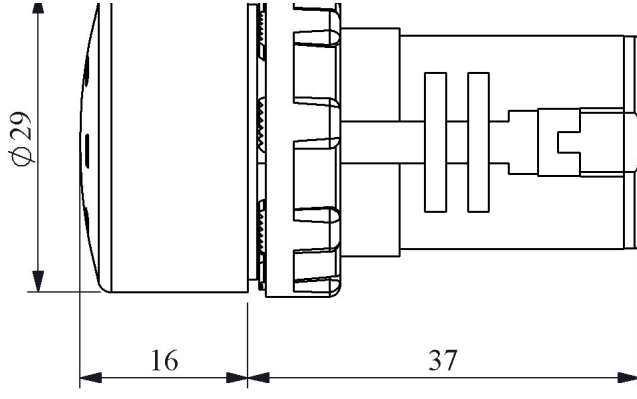

Montaj Ölçüsü  $\text{Ø}22.4 \pm 0.2 \text{ mm}$



Devre Şeması



Buzzer