



MKS1TM-0,16

Product	Motor Protection Switch
Serial	MKS Series
Thermic Current Calibration Interval	0,10-0,16A
Operational Frequency	50-60 Hz
Current (Ie)	25 A
Usage Category	AC 3
Mechanical Life (Min Qty)	100000
Electrical Life (Min Qty)	100000
Operating Frequency (On-Off/Hour)	Mek. 360 Elk. 360
Insulation Voltage (Ui)	690V AC
Impulse Withstand Voltage (Uimp)	6 kV
Dielectric Strength (Contact-Contact)	1890V
Isolation Resistance	10 MΩ Min. (500 V DC)
Operating Temperature	-5 / +40 °C
Pollution Degree	3
Protection Degree	IP40
Cable Section	0,75-4 mm ²
Screw Torque	1,8 Nm
	6 kA
Specifications	13 different product options between 0.16 - 25 A
	Fixedly set short circuit protection 12xIe
	Short circuit switching capacity minimum 6 kA / 400 V
	Protection against phase deficiency
	Compensated against ambient temperature
	Can be mounted on DIN 35 mm mounting rail
	Wide range of accessories
Standards / Certificates	TS EN 60947-4-1


CE

ERT



TSE

UK
PA

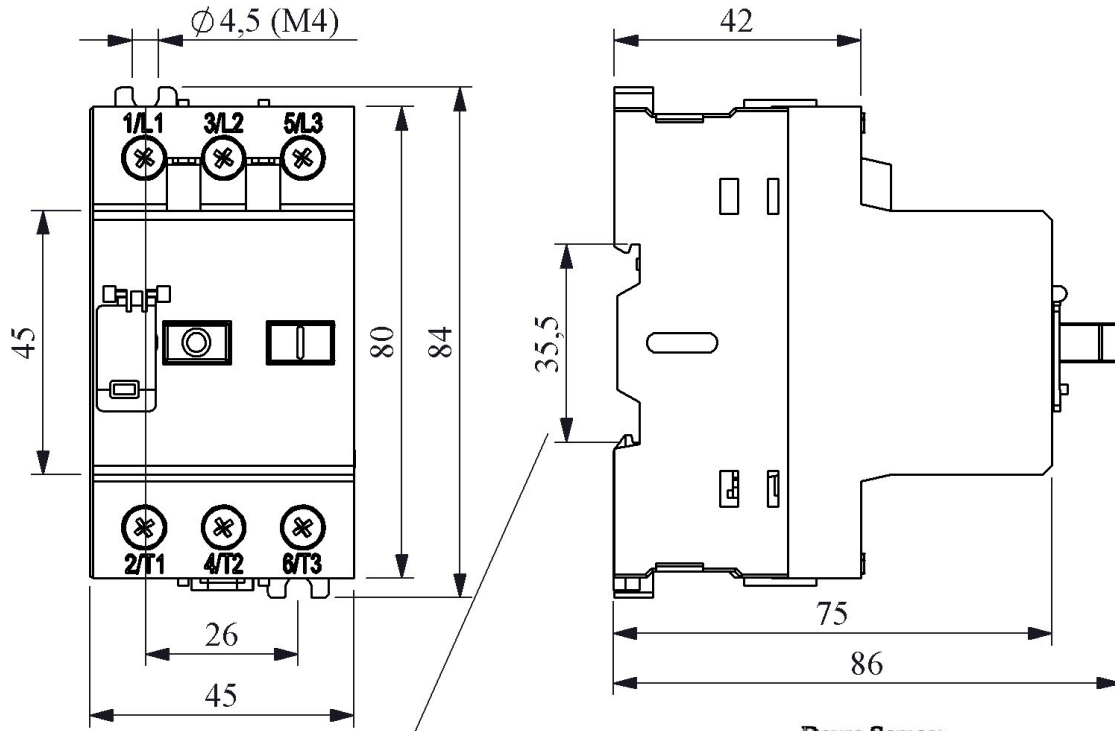

DIN rail EN 50022-35 Raya uygundur.

