




PA4404

Product	Lift Station	
Feature	with Cable Gland	
Color	Yellow-Black	
Current	I_e	4A (250V AC)
Usage Category	AC15	
Mechanical Life	Min Qty	1000000
Electrical Life	Min Qty	100000
Operating Frequency	On-Off/Hour	Mech. 3000 Elec. 1200
Insulation Voltage	U_i	300 V
Impulse Withstand Voltage	U_{imp}	2.5 kV
Dielectric Strength (Body-Contact)	2.500V AC	
Dielectric Strength (Contact-Contact)	1.500V AC	
Isolation Resistance	10 MΩ (500 V DC)	
Operating Temperature	-15 / + 80 °C	
Pollution Degree	3	
Protection Degree	IP65	
Contact Material	AgNi	
Cable Section	1.5-2.5 mm ²	
Screw Torque	1.5Nm	
Short Circuit Breaking Capacity	I_{cs}	1kA
Serial	PA Series	
Hole Qty	4 Holes	
Ingredients	B200E + B101DMOO + B606K20HBOK + PSA20ZS332AR	
Specifications	Suitable for Ø22 mm control units Aesthetic, durable and ergonomic design	
Standards / Certificates	TS EN 60947-5-1 UL 508 VDE 0660	

CE

ERT



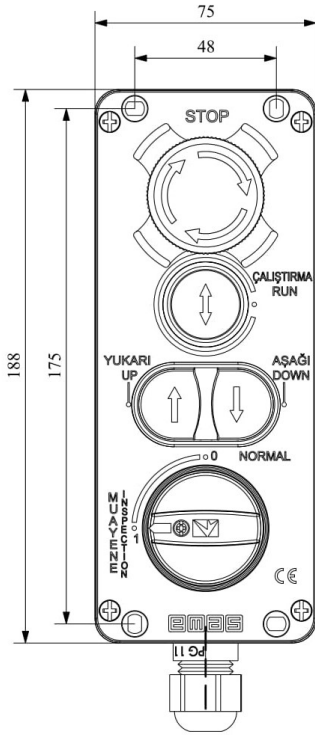

PA4404

Devre Şeması
1 ——— 2

Devre Şeması
3 ——— 4
3 ——— 4

Devre Şeması
3 ——— 4
3 ——— 4

Devre Şeması
3 ——— 4
3 ——— 4

	1	3	5	7	9
0			X	X	X
1	X	X			

