





RDH1A

Switching Capacity		6000/saat
Connection Type		8 Pins
Operational Frequency		50Hz
Operational Voltage		230VAC
Product		Panelmeter
Control		Digital
Type		Frequencymeter
Contact		1CO
Current	Ie	5A (rezistif)
Mechanical Life	Min Qty	10000000
Electrical Life	Min Qty	100000
Operating Temperature		-5°C...+55°C
Protection Degree		IP20
Contact Material		AgNi
Output Type		1 pcs relay 10A/250V AC
Measure Interval		100...250 V AC/30-70 Hz
Maximum Contact Power		1500 VA
Number of Contact		1 changeover
Voltage Interval		(0,85-1.1)*Ue
Indicator		7 Segment Display
Number of Digits		3
Serial		RD Series
Specifications		Compact design
		Fast and silent switching
		Long life
		Fingerproof design

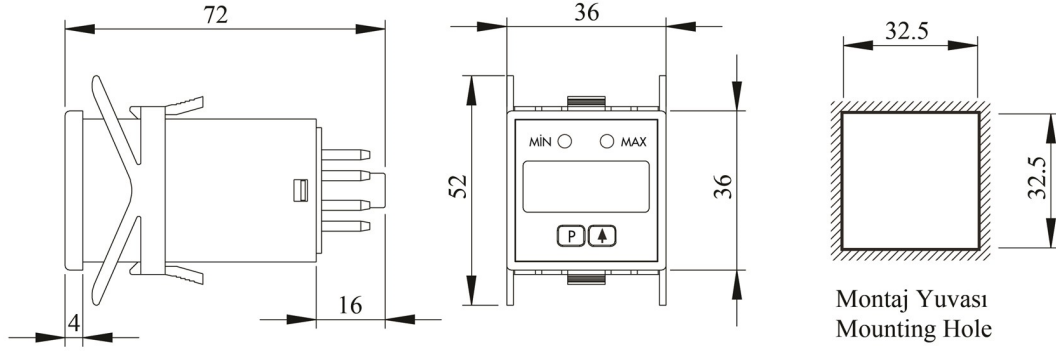

2-7 : Besleme (220 V AC) / Supply (220 V AC)

3-4-5: Çıkış kontakları / Relay output

1-8 : Ölçme girişi / Measuring input

Not : Dijital panelmetreler RS1P08 tipi röle soketiyle kullanıma uygundur.
Note : Digital panelmeters can be used with RS1P08 type sockets.