RDH1A		
Switching Capacity		6000/saat
Connection Type		8 Pins
Operational Frequency		50Hz
Operational Voltage		230VAC
Product		Panelmeter
Control		Digital
Type		Frequencymeter
Contact		1CO
Current	**Ie**	5A (rezistif)
Mechanical Life	**Min Qty**	10000000
Electrical Life	**Min Qty**	100000
Operating Temperature		-5°C...+55°C
Protection Degree		IP20
Contact Material		AgNi
Output Type		1 pcs relay 10A/250V AC
Measure Interval		100...250 V AC/30-70 Hz
Maximum Contact Power		1500 VA
Number of Contact		1 changeover
Voltage Interval		(0,85-1.1)*Ue
Indicator		7 Segment Display
Number of Digits		3
Serial		RD Series
Specifications	Compact design	
	Fast and silent switching	
	Long life	
	Fingerproof design	

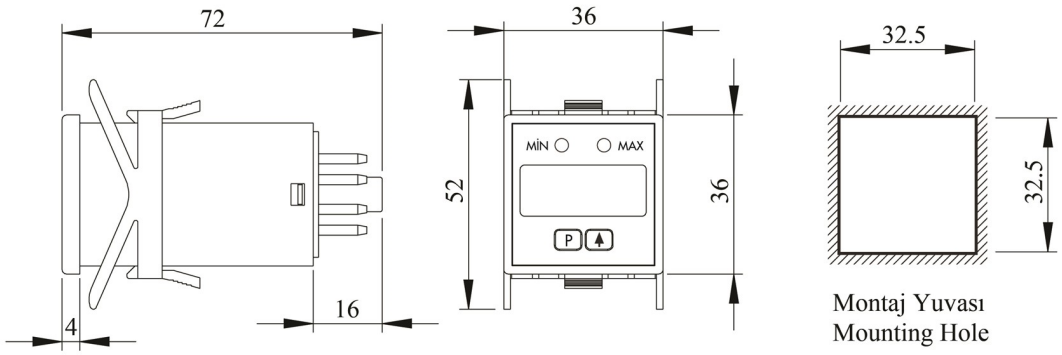

Montaj Yuvası
Mounting Hole



2-7 : Besleme (220 V AC) / Supply (220 V AC)
3-4-5: Çıkış kontakları / Relay output
1-8 : Ölçme girişi / Measuring input

Not : Dijital panelmetreler RS1P08 tipi röle soketiyle kullanıma uygundur.
Note : Digital panelmeters can be used with RS1P08 type sockets.