



**RZ1D1R-1**

Switching Capacity		6000/saat
Connection Type		8 Pins
Operating Current		0.04A
Operational Frequency		50 Hz
Operational Voltage		12VAC/DC
Product		Electronic Relay
Control		Digital
Type		Time
Contact		1CO
Current	<b>Ie</b>	5A (rezistif)
Power Consumption		0.4W
Mechanical Life	<b>Min Qty</b>	10000000
Electrical Life	<b>Min Qty</b>	100000
Operating Temperature		-5°C...+55°C
Protection Degree		IP30
Contact Material		AgNi
Time Interval		0,1sec-99,59hour
Maximum Contact Power		1500 VA
Number of Contact		1 changeover
Max. Reset Time		≤100ms
Voltage Interval		(0,85-1.1)*Ue
Indicator		7 Segment Display
Number of Digits		4
Serial		RZ1 Series
Specifications		Compact design
		Fast and silent switching
		Long life
		Fingerproof design



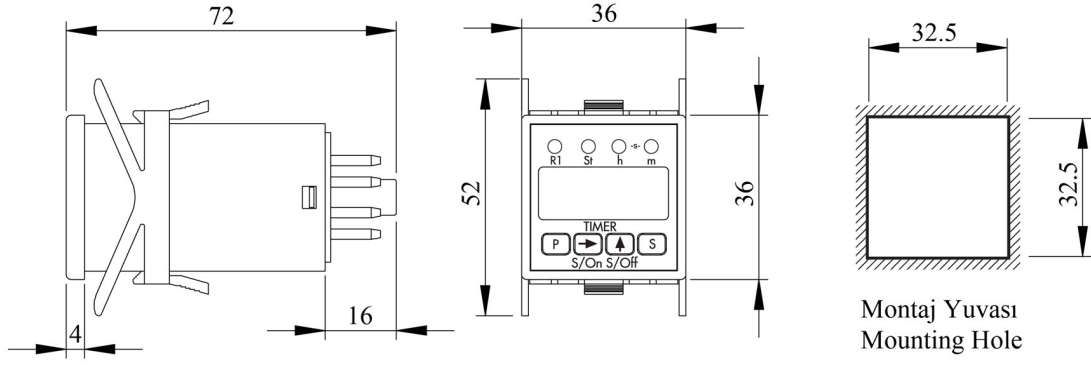

- 2-7 : Besleme / Supply
- 1-6 : İnhibit girişı / Inhibit input
- 1-8 : Start girişı / Start input
- 3-4-5 : Zamana bađlı çıkış kontaktarı / Timed relay output

Not: Dijital zaman röleleri RS1P08 tipi röle soketiyle kullanıma uygundur.  
 Note: Digital time relays can be used with RS1P08 type sockets.